

Super Spacer[®] Premium Plus is a flexible, silicone foam spacer that provides the maximum in perimeter insulation for sealed glazing units. Desiccant-filled with pre-applied side adhesive, the structural foam product significantly simplifies insulating glass (IG) production.



Basic Use

Super Spacer is a dual seal insulating glass spacer system that uses a high-performance acrylic adhesive for its structural seal and is backed with a proprietary multi-layer moisture vapor seal.

Featuring a vapor barrier backing, the spacer must be used in combination with conventional IG sealants. For a list of verified sealants, please reference IG sealants Technical Bulletin RD0018, which is available on our website at www.superspacer.com in the technical section.

Colors

Super Spacer Premium is available in Grey, Aluminum, Black, Almond, White, Blue White.

Composition

Silicone foam base with desiccant pre-fill.

Desiccant Fill

3A molecular-sieve; 47% minimum by weight.

Continuous Packaged Length

For regular insulating glass production, Super Spacer Premium Plus is supplied on reels with the continuous packaged length varying depending on the spacer width.

Protective Packaging

To provide desiccant protection, the reels are sealed in moisture-proof foil bags. The reels are then shipped in recyclable cardboard boxes.

Performance	Norm
Thermal conductivity 0.102 W/m ² °K	ASTM C 518
Gas / Moisture vapor barrier WVTR < 0.020 gm/m ² /day Oxygen < 0.009 cc/m ² /day	ASTM F 1249 ASTM D 3985
Primary structural seal Acrylic adhesive	
Intermittent temperature range -40°C to 121°C / -40°F to 250°F	—
Verified secondary sealants Reference IG sealants Technical Bulletin RD0018	—
Fogging No fog in visual area.	ASTM E 2190 EN 1279 - 6 CAN/CGSB 12.8
Gas Retention Pass with hot-melt butyl or curative butyl	EN 1279 - 3
I.G. Durability Pass with hot-melt butyl or curative butyl	ASTM E 2190 EN 1279 - 2

Warm-Edge Silicone Foam Features & Benefits

- Superior silicone foam insulation
- Low thermal conductivity
- Substantially reduced perimeter condensation
- Typical overall 0.2 W/m²K (0.04 BTU/h-ft²-°F) U-value window improvement (vs. aluminum)
- Excellent UV resistance
- Extreme temperature performance
- Fast dew-point drop
- Superior compression-set resistance
- Excellent color stability
- Enhanced sound dampening

Edge-Seal Durability

- Continuous vapor barrier at corners
- No chemical fogging
- High desiccant content
- Same spacer material and edge-seal technology as the proven Premium Plus product.

Unique Dual-Seal Design


- Outer hot-melt butyl sealant for enhanced gas retention
- Inner structural acrylic side adhesive
- Immediate unit handling
- No cold flow or spacer/seal migration problems

Improved Productivity

- Fast application
- Elimination of desiccant filling
- No corner key assembly
- Simplified production of shaped units
- Limited equipment investment
- High-volume production with reduced labor force

Pleasing Aesthetic Appearance

- Warm grey color, additional standard colors
- Smooth matte surface finish
- No surface blistering or bubbling
- Straight-line application with sharp 90° corners

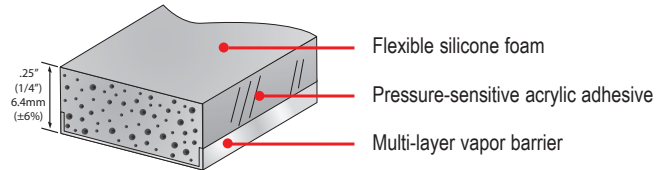

Reel Sizes

Width mm	Width inches	Meter/ Reel	Feet/ Reel	Meter/ Auto Reel	Feet/ Auto Reel
3.2 mm	.125"	457	1500	N/A	N/A
4.8 mm	.188"	457	1500	1372	4500
6.4 mm	.250"	335	1100	1006	3300
7.9 mm	.313"	305	1100	914	3000
9.5 mm	.375"	274	900	823	2700
11.1 mm	.438"	244	800	731	2400
12.7 mm	.500"	213	700	640	2100
14.3 mm	.563"	190	625	571	1875
15.9 mm	.625"	175	575	526	1725
17.5 mm	.688"	152	500	N/A	N/A
19.1 mm	.750"	152	500	457	1500
20 mm	.787"	122	400	N/A	N/A

Note: Nominal sizes larger than 0.375" (3/8") have a tolerance of +/- 3% for the width (airspace) and +/- 6% for the height (thickness).
For nominal sizes 0.375" (3/8") and lower the tolerance is +/- 0.010" on the width (airspace) and +/- 6% for the height (thickness).
Note: All metric dimension equivalent sizes are for reference only.