


You want to do your part. We can help.

© Quanex Building Products 2008 • #MUVHWC • rev. 03/2018



The all-foam formula of Super Spacer® is proven to be less conductive, blocking heat from entering or escaping through the glass edge, providing optimal thermal performance and the lowest U-Factor among dual seal systems in the industry.

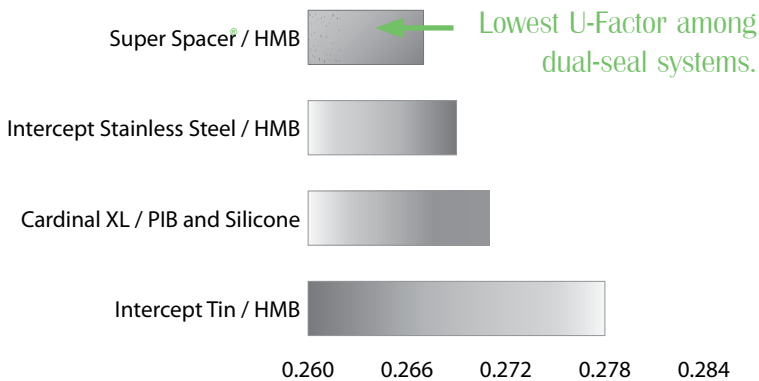

Simulations performed by WSP Canada Ltd. using Window 7.4 and Therm 7.4, according to NFRC 100-2014 and NFRC 200-2014. All models were 1200 x 1500 mm (approx. 48" x 60") and NFRC-2010 conditions – 0°F outside, 70°F inside – were used for all simulations. Low-e glass for double-pane IG was Cardinal Low-E<sup>2</sup> 270; low-e glass for triple-pane IG was Cardinal Low-E<sup>3</sup> 366. All air spaces 0.500" wide, with 90% Argon fill. Doubles were modeled as IG units only and in Mikron 1400 series SSTDH; triples were modeled as IG only and in Mikron 10700 (EnergyQuest) series SSTDH. Secondary sealant materials and depths are as listed. Temperature values shown are from modeling results, and were measured at the sightline (SL) and at 0.5" above the sightline (SL+½") thick. Super Spacer®, Duralite® and Duraseal® are registered trademarks of Quanex Building Products. Intercept® is a registered trademark of GED Integrated Solutions. XL Edge™ is a trademark of Cardinal Glass Industries. [QBP17M00614]

- Optimized energy savings
- Enhanced environmental comfort and health near windows
- Condensation and mold resistance like no other spacer
- Extreme durability for sustainable performance

**Super Spacer®**  
**SustainaView®**  
 Window Technology

LEARN MORE AT [energystar.gov](http://energystar.gov)

[www.sustainaview.com](http://www.sustainaview.com)